




XP8 350A

AIR COOLED MIG TORCH

350A, 10.5kW, Mixed Gas (80/20) @ 80% Duty Cycle, EN60974-7 1.0mm-1.6mm (.040"-1/16") Wires

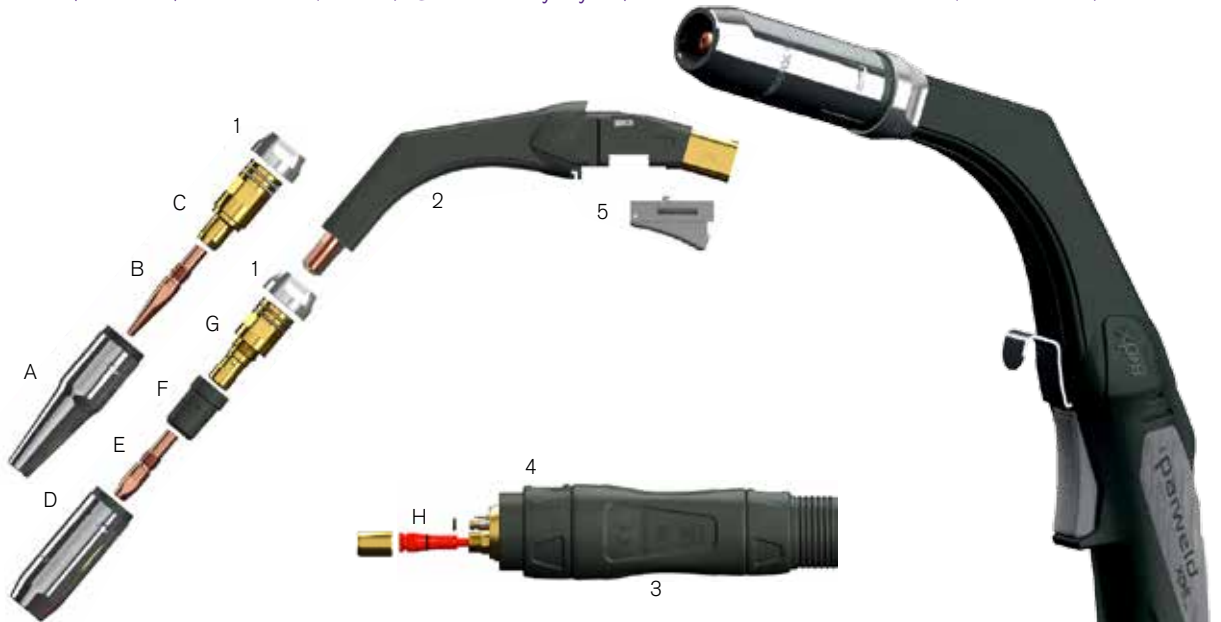

STOCK CODE	DESCRIPTION
XP350A-30E	Torch Package c/w Euro Fitting x 3m
XP350A-40E	Torch Package c/w Euro Fitting x 4m
XP350A-50E	Torch Package c/w Euro Fitting x 5m

STOCK CODE	DESCRIPTION
1 XP3506A*	Aluminium Heat Shield-M10 Head
NI XP3506B	Heat Shield-Moulded-M10 Head
2 XP3501	Swan Neck
3 XP2018	Air Cooled Gun Plug Housing c/w Nut
4 XP2020	Gun Plug Nut
5 XP2014	Trigger

H Liners See page 42 for full range	
STOCK CODE	DESCRIPTION
XP3524-12-30*	Steel 1.0-1.2mm (.040-.045") x 3m
XP3524-12-40*	Steel 1.0-1.2mm (.040-.045") x 4m
XP3524-12-50*	Steel 1.0-1.2mm (.040-.045") x 5m
XP3524-16-30	Steel 1.2-1.6mm (.045-.063") x 3m
XP3524-16-40	Steel 1.2-1.6mm (.045-.063") x 4m
XP3524-16-50	Steel 1.2-1.6mm (.045-.063") x 5m
XP2024PC-12-30	Poly-Copper 0.8-1.2mm (.030-.045") x 3m
XP2024PC-12-40	Poly-Copper 0.8-1.2mm (.030-.045") x 4m
XP2024PC-12-50	Poly-Copper 0.8-1.2mm (.030-.045") x 5m
XP3524PC-16-30	Poly-Copper 1.2-1.6mm (.045-.063") x 3m
XP3524PC-16-40	Poly-Copper 1.2-1.6mm (.045-.063") x 4m
XP3524PC-16-50	Poly-Copper 1.2-1.6mm (.045-.063") x 5m
XP2024PS-12-30	Poly-Steel 0.8-1.2mm (.030-.045") x 3m
XP2024PS-12-40	Poly-Steel 0.8-1.2mm (.030-.045") x 4m
XP2024PS-12-50	Poly-Steel 0.8-1.2mm (.030-.045") x 5m
XP3524PS-16-30	Poly-Steel 1.2-1.6mm (.045-.063") x 3m
XP3524PS-16-40	Poly-Steel 1.2-1.6mm (.045-.063") x 4m
XP3524PS-16-50	Poly-Steel 1.2-1.6mm (.045-.063") x 5m

PULSE WELDING
We recommend using a liner one size larger for a smooth wire feed during pulse welding.

ALTERNATIVE ENDS AVAILABLE
See pages 164 - 165 for more information.

FULL PARTS BREAKDOWN AVAILABLE
visit www.parweld.com for more information.

Tapered Nozzles

A

STOCK CODE	STYLE	BORE
XP3002-10T	Tapered	10mm (3/8")

Tapered Contact Tips

B

STOCK CODE	WIRE SIZE	MATERIAL
XP3003-10T	1.0mm (.040")	CuCrZr
XP3003-12T	1.2mm (.045")	CuCrZr
XP3003-13T	1.3mm (.052")	CuCrZr
XP3003-14T	1.4mm (.055")	CuCrZr
XP3003-16T	1.6mm (1/16")	CuCrZr

Tapered Head Assembly

C

STOCK CODE	TIP THREAD
XP3505T	M10

Nozzles

D

XP3002-13	Tapered	13mm (1/2")
XP3002-16	Conical	16mm (5/8")
XP3002-19	Cylindrical	19mm (3/4")

Extended Nozzles

E

XP3002-16L	Conical Ext	16mm (5/8")
XP3002-19L	Cylindrical Ext	19mm (3/4")

Contact Tips

E

XP3003-10	1.0mm (.040")	CuCrZr
XP3003-12*	1.2mm (.045")	CuCrZr
XP3003-13	1.3mm (.052")	CuCrZr
XP3003-14	1.4mm (.055")	CuCrZr
XP3003-16	1.6mm (1/6")	CuCrZr
XP3003-10A	1.0mm (.040")	CuCrZr
XP3003-12A	1.2mm (.045")	CuCrZr

Diffusers

F

STOCK CODE	TYPE	HEAD
XP3004B*	Moulded with Ceramic Insert	M10
XP3004C (NI)	Ceramic	M10
XP3004S (NI)	Grey	M10

Head Assembly

G

XP3505*	M10
---------	-----



Parweld Glove Leather
Reflective Heat Shield
Protection for intense
welding environments.
Go to page 363 for
more information.

* Denotes standard build

ROLL MARKING

All Parweld consumables are roll marked to enable you to identify genuine Parweld product.