

BLACKline Torch sets MS/MG/MC 330 (up to 300A)

Properties


- Flexible supply hose
- Bend protection at the plug view
- Gas nozzle with rugged trapezoidal thread
- Optimum gas coverage by recessed contact tip
- Gas reduction by laminar gas flow and design of the tip adapter
- No gas loss due to separate shield gas feed

Application

- Non- and low alloyed steels
- High alloyed steels
- Copper alloys for the MSG brazing
- Small to medium material thicknesses

Technical data (DIN EN 60 974-7):

	duty cycle
CO ₂ :	300A/60%
Mixed gas:	270A/60%
Wire diameter:	1.0 - 1.2 mm

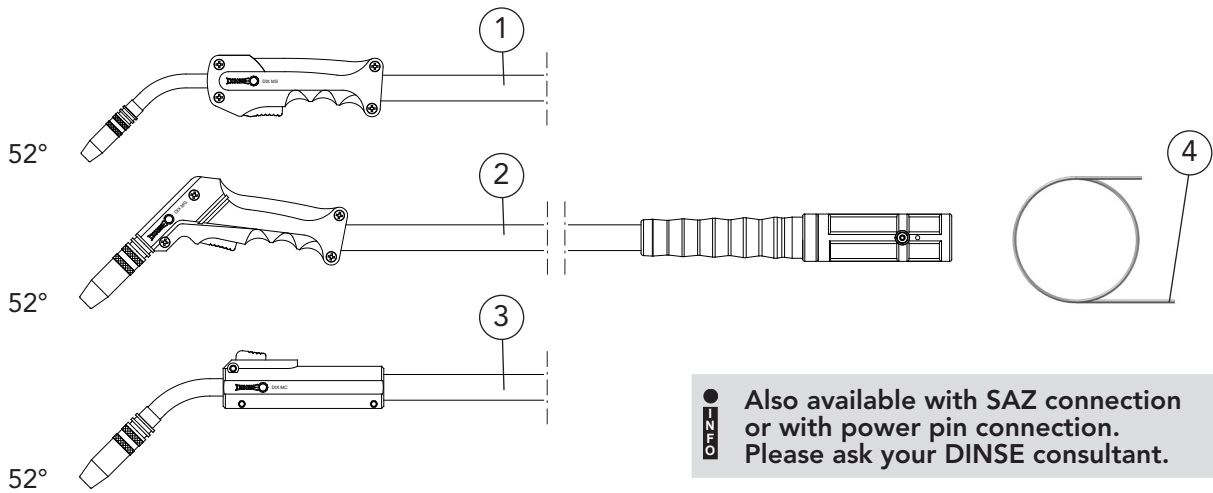

● Also available with SAZ connection or with power pin connection. Please ask your DINSE consultant.

Description	Dimension	Part name	Part number
1 Torch set	3.00 m	DIX MS 330-3	6202133130
Torch set	4.00 m	DIX MS 330-4	6202133140
2 Torch set	3.00 m	DIX MG 330-3	6202033130
Torch set	4.00 m	DIX MG 330-4	6202033140
3 Torch set	3.00 m	DIX MC 330-3	6202333130
Torch set	4.00 m	DIX MC 330-4	6202333140
4 Liner	ø 1.8 mm/3.5 m	DIX DS 4/1.8-3.5	613000235
Liner	ø 1.8 mm/4.5 m	DIX DS 4/1.8-4.5	613000245

Hint:

Other liners, capillary liners and service tools you will find in chapter tools and accessories.